



## Features:

- Excellent performance from a small and compact digital camera for microscopy with fast live images and high-resolution still images
- Ideal camera for documentation and analysis for a wide range of applications
- Streaming live video on computer monitor via high-speed USB 2.0 bus at 480 Mbits/s
- Very low noise and high sensitivity
- Perfect image and colour quality with fine details
- Resolution of up to 8 megapixel in colour
- Automatic and manual exposure and sensitivity control
- Easy and flexible daily use with dynamic insertion and removal of the camera to PC and notebook via a single standard USB 2.0 high-speed interface
- Small compact camera with optical C-mount for easy attachment to a microscope
- Tripod receptacle for mounting to stands for macro photography
- Low power consumption allows silent operation without the need for a noisy fan
- Free "DeltaPix InSight LE" Intuitive user software with powerful and easy-to-use image capture and processing functions.
- Software is upgradable with modules
- Back focus adjustment
- Manufactured in Denmark

## Fast Streaming Video, high sensitivity and unique colour fidelity.

### Invenio 8DII design

The Invenio 8DII camera, is designed with focus on high sensitivity, colour fidelity and image quality. All Invenio DII cameras are utilize the highest quality Sony CCD sensors, which, when it comes to colour fidelity, are still superior to CMOS sensors.

### Easy-to-use

All Invenio 8DII uses a standard C-mount interface for universal use and flexible attachment to microscopes.

Installation of the electronic connection is very simple via connecting of a single standard USB 2.0 cable, between the camera and the computer, for power, control information and to transmit data.

### Fast Video

The use of the 480 Mbits/s high-speed architecture of the USB 2.0 international standard, deliver fast streaming colour video in high resolution on the monitor of the connected computer. The high quality CCD sensors in the Invenio 8DII cameras, are designed with focus on the highest quality, but also with the goal of achieving good update rates. The result is an update rate which is perfect for most microscope applications, and with the high sensitivity of these cameras, the "real life" update rate, is often faster than with so called high speed, but less sensitive cameras.

### Direct Digitalization

The digitalization of the image signal direct at the sensor allows high transfer speed and reliable data communication with no loss of information or reduction in image quality.


### Comfortable Operation

The powerful "DeltaPix InSight LE" software included with all Invenio cameras provides a wide range of image capture and archiving functions.

Easy handling and a user-friendly application plays an important role in the design of the product, making sure that both first-time users and experienced, creative users can take full advantage of digital imaging.

### Ideal for low light applications

The extreme low noise and the possibility to use exposure times of several minutes, makes the Invenio II CCD cameras ideal also for low light applications like fluorescence. For these applications it is often necessary to choose between fast frame rates for easy focussing or long exposure times for high sensitivity. With Invenio 8DII this can be combined, as the camera can use high gain / low exposure = fast framerate, in live mode, and then automatically convert gain to long exposure in snapshots, in order to achieve the highest possible low noise image for archiving. This is a unique feature of all DeltaPix CCD cameras.

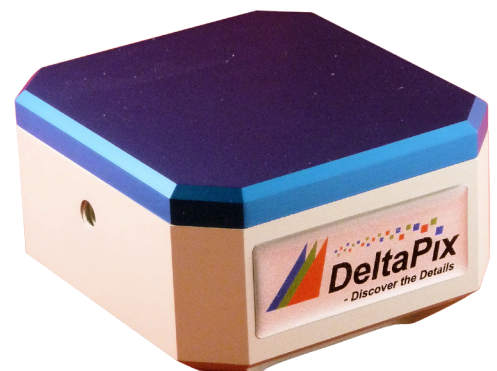

## Invenio 8DII Specifications

### Imager

Effective size:	1/1.8" format CCD 7.3 mm x 5.5 mm
Colour filter:	Red, green and blue in Bayer pattern
Effective pixels:	3,264 x 2,472 pixels (8 million pixels)
Pixel size:	2.22 x 2.22 microns
Dynamic range:	>61 dB
Exposure time:	0.01 milliseconds to 360 seconds
Binning:	YES (2x2)
Exposure sensitivity:	Adjustable from 1 to 6 times
Exposure mode:	Automatic, manual or converging
Colour balance:	Automatic, manual or spot white balance
Shutter:	Electronic global shutter

### Digital Still Image

Single exposure:	3,264 x 2,472 pixels (8 million pixels)
------------------	--

### Data Format & Compression

Digital output:	36 bit uncompressed TIFF-RGB (8 bits per colour)
	36 bit uncompressed TIFF-RGB (12 bits per colour)
	36 bit loss-less compressed JPEG2000 (8 bits per colour)
	36 bit compressed JPEG (8 bits per colour)
	36 bit uncompressed video in AVI format (8 bits per colour)

### Operational Requirements




Temperature:	0°C to +50°C
Humidity:	5% to 95% RH (non-condensing)

### Physical Data

Optical mount:	Standard C-mount
Mechanical mount:	Tripod receptable for macro photography
Enclosure:	Blue/grey Aluminium with tripod mount
Height:	45
Width:	80
Depth:	75
Weight:	360g
Compliance:	CE

### Computer & Software

Data interface:	480 Mb/s high-speed USB 2.0 architecture
Cable:	Standard USB 2.0 cable with series "B" connector
Power:	USB
Application interface:	Intuitive, easy-to-use user application
Application support:	DirectX driver for integration to 3rd party video applications

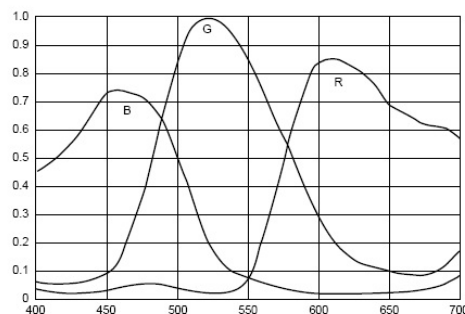

### Digital Video

Resolution:	3,264 x 2,472 pixels (more than 2 fps) In subsample mode binning 2x2 (20 fps)
-------------	--

### Minimum computer platform

- 1 GB RAM
- 15 GB free harddisk space
- USB 2.0 port
- Windows XP, Vista, 7, 32 and 64 bit

### Product Includes:

- Invenio 8DII digital camera for USB 2.0
- CD-ROM with
  - Stand-alone user application
  - DirectX driver
  - Documentation
- USB 2.0 cable (2.0m)

### Optional:

Software Developer Kit (SDK) for developing deep integration with other software applications

Specifications and products are subject to change without any notice or obligation on part of DeltaPix Aps. October 2011.  
DeltaPix and Invenio 8DII are trademarks of DeltaPix Aps. All other brands or product names are trademarks or registered trademarks of their respective holder. © 2013 DeltaPix Aps.



Your DeltaPix contact

[www.deltapix.dk](http://www.deltapix.dk)